


Specifications:

connector description (1)	USB-A plug; inner mold: 30P, PVC, black; outer mold: 60P, PVC, black
connector description (2)	dc plug, 5.5x2.1xL23 mm, molding style, spring contacts, black insulator, P/N 50-00024
overmold (3)	30P, PVC, black, UL94V0
wire description (4)	UL2468, 0.16 x 17 strands, 2 conductor, twin wire
cable outer diameter	Ø3.6 (1.8 x 2) mm
cable color	black
cable gauge	AWG #22
cable length	1830 ± 50 mm
twist tie (5)	black, 89 ± 3 mm
rated load	1 A at 5 Vdc

Notes:

Function test: no open, no reversed polarity, no short circuit, no INT
 Hi-POT test: 600 Vac, 0.5 mA, 1 sec.
 RoHS compliant

Mechanical drawing:

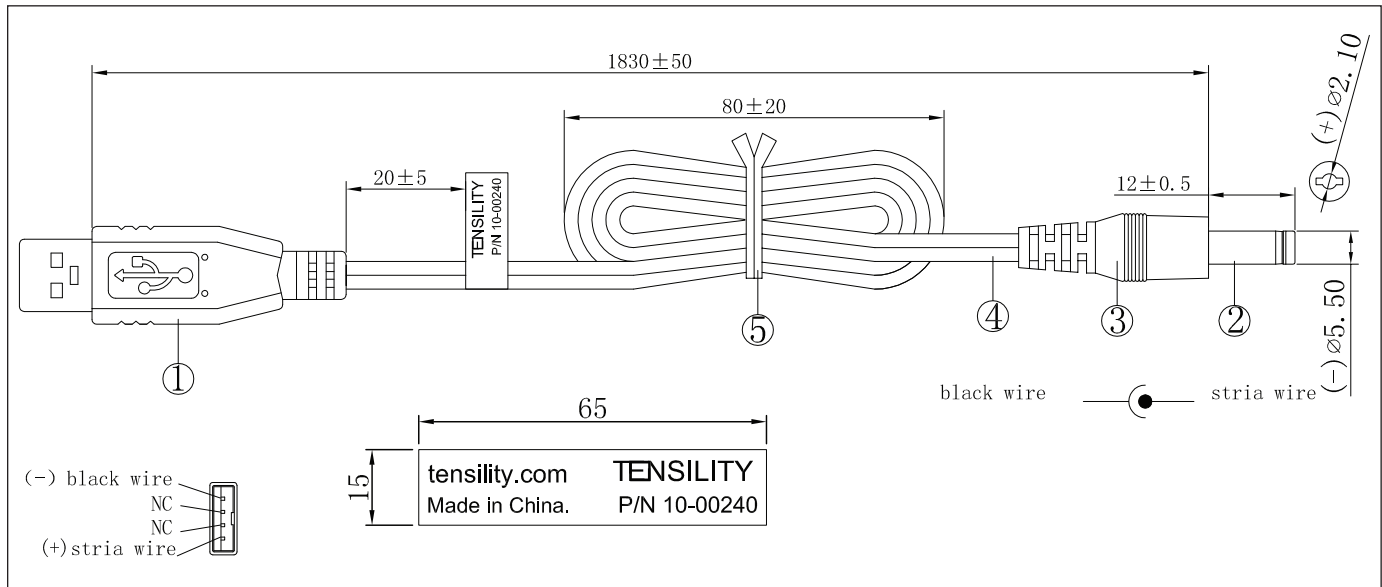

Initial

Date

tolerance X: ± 0.5 mm .X: ± 0.3 mm .XX: ± 0.05 mm

Revision notes:

Rev	Date	Description
A	November 10, 2009	initial release
A1	March 16, 2010	added label drawing
A2	September 6, 2011	updated specifications

Specification Approval

Spec sign-off verifies that you have reviewed the entire specification, tested a sample of the product, and confirm that it meets your requirements. This specification reflects the part as it will be ordered. Orders will not be processed until the specification pages have been initialed and the approval page has been signed. This specification is confidential and is not to be transmitted without prior approval from Tensility.

Signature _____

Title _____

Name _____

Date _____