


Specifications:

| | |
|---------------------------|--|
| connector description (1) | USB-A plug; inner mold: 30P, PVC, black; outer mold: 60P, PVC, black |
| connector description (2) | dc plug, 3.5x1.35x20mm, molding style, spring contacts, P/N 50-00056 |
| overmold (3) | 30P, PVC, black, UL94V0 |
| wire description (4) | UL2468, 0.16 x 17 strands, 2 conductor, twin wire |
| cable outer diameter | Ø3.6 (1.8 x 2) mm |
| cable color | black |
| cable gauge | AWG #22 |
| cable length | 1830 ± 50 mm |
| twist tie (5) | black, 89 ± 3 mm |
| rated load | 1 A at 5 Vdc |

Notes:

Function test: no open, no reversed polarity, no short circuit, no INT
 Hi-POT test: 600 Vac, 0.5 mA, 1 sec.
 RoHS compliant

Mechanical drawing:

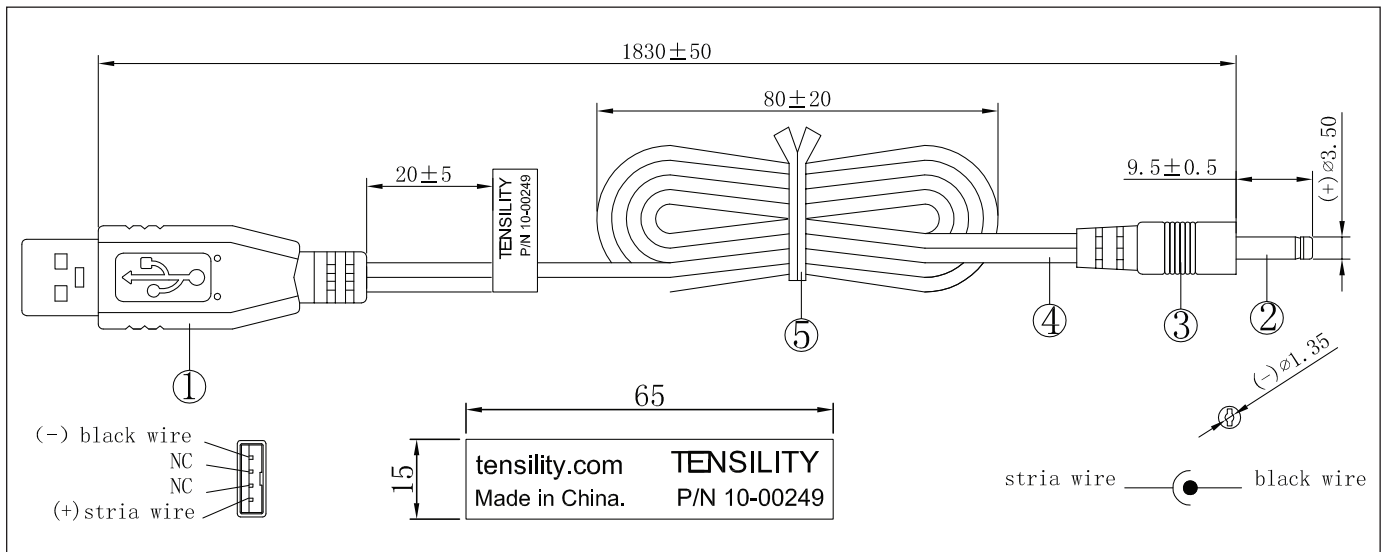

| | |
|---------|------|
| Initial | Date |
|---------|------|

tolerance X: ±0.5 mm .X: ±0.3 mm .XX: ±0.05 mm
 applicable unless otherwise indicated in specification or on drawings

Revision notes:

| Rev | Date | Description |
|-----|-------------------|------------------------|
| A | November 10, 2009 | initial release |
| A1 | March 18, 2010 | label drawing added |
| A2 | September 6, 2011 | updated specifications |
| | | |
| | | |

Specification Approval

Spec sign-off verifies that you have reviewed the entire specification, tested a sample of the product, and confirm that it meets your requirements. This specification reflects the part as it will be ordered. Orders will not be processed until the specification pages have been initialed and the approval page has been signed. This specification is confidential and is not to be transmitted without prior approval from Tensility.

Signature _____

Title _____

Name _____

Date _____