


Specifications:

connector description (1)	stereo plug, 2.5 mm, brass, nickel plated, white insulators, P/N 50-00084
connector overmold (2)	inner: 30P, PVC, white; outer: 60P, PVC, white
wire description (4)	AWG #28 (0.12 x 7 strands) 4 conductor (red, white, green, black), shield wire, Al-mylar shield, 1F, PVC jacket
cable outer diameter	Ø3.8 mm
cable color	white
cable length	1830 ± 50
twist tie (3)	white, 89 ± 3


Notes:

Function test: no open, no reversed polarity, no short circuit, no INT
 Hi-Pot test: 600 Vac, 0.5 mA, 1 second
 RoHS compliant

Mechanical drawing:

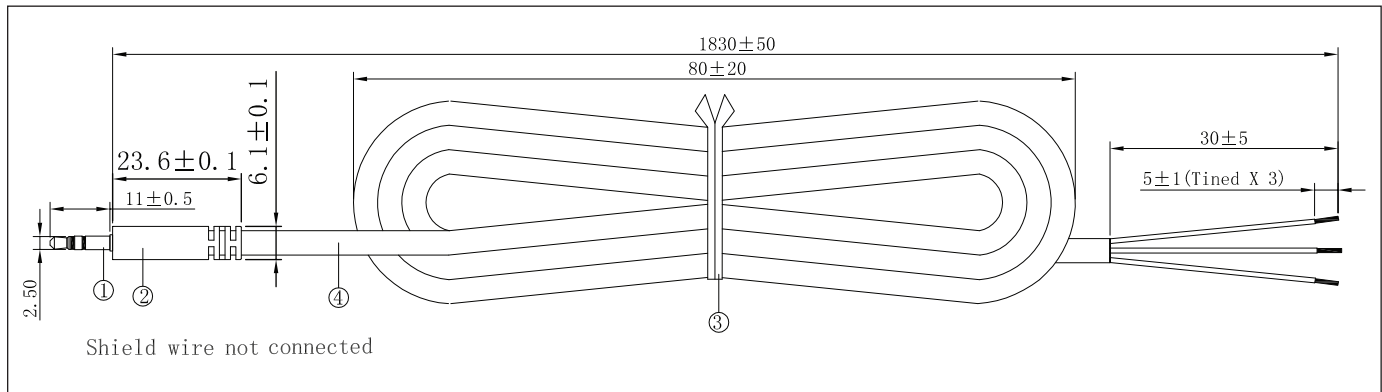

Wiring diagram:

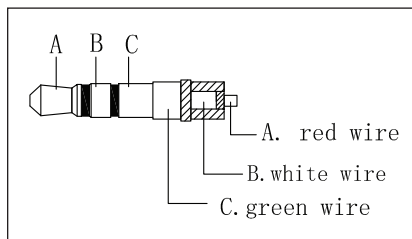

Initial _____ Date _____

tolerance X: ±0.5 mm .X: ±0.3 mm .XX: ±0.05 mm
 applicable unless otherwise indicated in specification or on drawings

Revision notes:

Rev	Date	Description
A	April 14, 2010	initial release
A1	October 5, 2010	updated wiring diagram
A2	September 6, 2011	updated specifications

Specification Approval

Spec sign-off verifies that you have reviewed the entire specification, tested a sample of the product, and confirm that it meets your requirements. This specification reflects the part as it will be ordered. Orders will not be processed until the specification pages have been initialed and the approval page has been signed. This specification is confidential and is not to be transmitted without prior approval from Tensility.

Signature _____

Title _____

Name _____

Date _____