


### Specifications:

connector description (1)	2.5 mm, 20.2 mm long, 4C audio plug, brass nickel plated, P/N 50-00007
overmold (2)	inner: 30P, PVC, black; outer: 60P, PVC, black
wire description (4)	AWG #28 (0.12 x 7), 4 conductor (red, white, green, black), shield wire, aluminum-mylar shield, 1F, PVC jacket, black
cable outer diameter	Ø3.8 mm
cable color	black
cable length	1830 ± 50 mm
twist tie (3)	black, 89 ± 3 mm


### Notes:

Function test: no open, no reversed polarity, no short circuit, no INT  
 RoHS compliant

### Mechanical drawing:

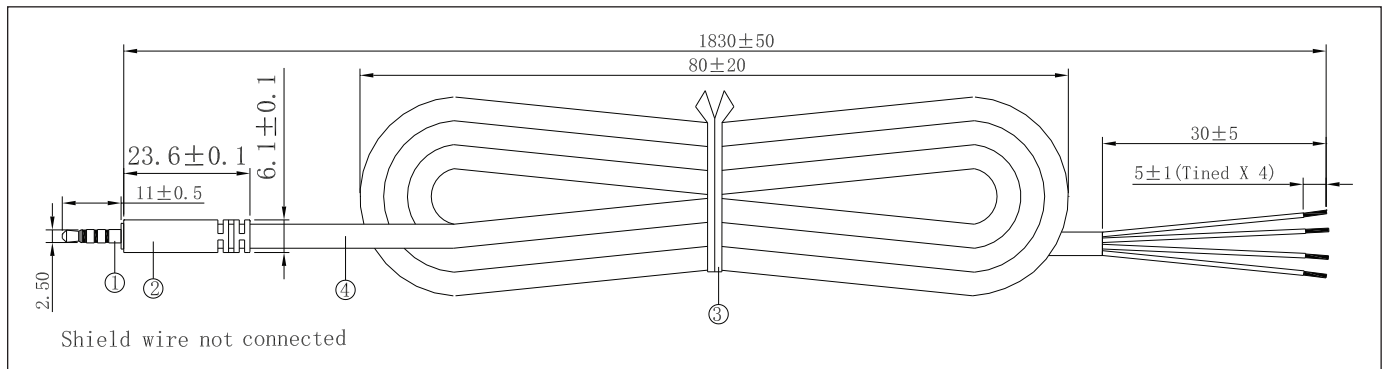

### Wire diagram:

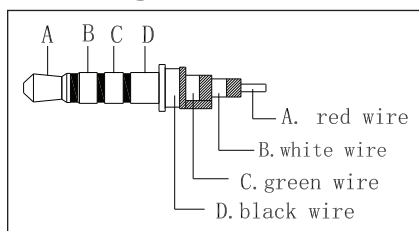

Initial \_\_\_\_\_ Date \_\_\_\_\_

tolerance X: ±0.5 mm .X: ±0.3 mm .XX: ±0.05 mm  
 applicable unless otherwise indicated in specification or on drawings

**Revision notes:**

Rev	Date	Description
A	May 10, 2010	initial release
A1	September 6, 2011	updated specifications

**Specification Approval**

Spec sign-off verifies that you have reviewed the entire specification, tested a sample of the product, and confirm that it meets your requirements. This specification reflects the part as it will be ordered. Orders will not be processed until the specification pages have been initialed and the approval page has been signed. This specification is confidential and is not to be transmitted without prior approval from Tensility.

Signature \_\_\_\_\_

Title \_\_\_\_\_

Name \_\_\_\_\_

Date \_\_\_\_\_