


| ITEM NO. | PART NUMBER | DESCRIPTION | QTY. | COMPONENT NOTES |
|----------|-------------|---|------|-----------------|
| 1 | 50-00026 | Connector, dc plug, 5.5x2.5xL23 mm, molding style, spring contacts | 1 | |
| 2 | 30-00415 | Wire, 2C TS, 18 AWG, UL2468, 300V, 80°C, 4.4 mm, VW-1, PVC, red and black | 1 | |
| 3 | 24-00003 | Overmold | 1 | PVC, black |

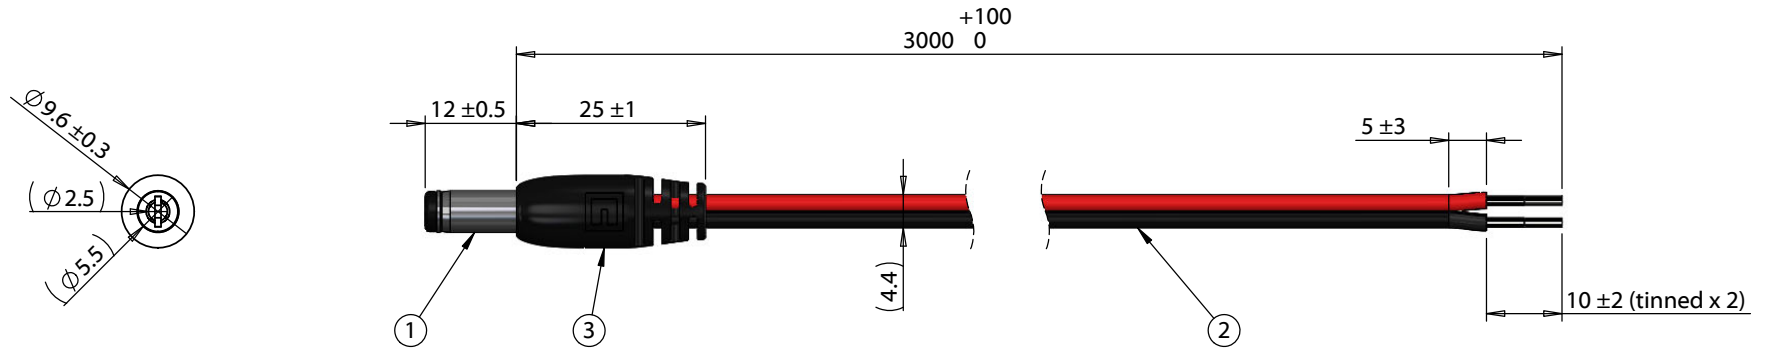

Notes:

Functionally equivalent components may be substituted

Cable rated for 48 V, 8 A

| Wiring diagram | |
|----------------|------------|
| 50-00026 | Wire Color |
| Center | Red |
| Sleeve | Black |

| | | | | | |
|-----------|-----------|-----------------|--|---|--|
| Revision: | Date: | Description: | Prepared: | Notes: | <h1>TENSILITY</h1> <p>tel 1.541.323.3228 800 877.670.7118 fax 1.541.323.4202 web tensility.com</p> |
| A | 11/1/2022 | Initial release | Verified: | | |
| | | | Dimensions are in millimeters. | Function test: no open, no short circuit, no intermittent | Size: A |
| | | | Tolerances: X: ± 0.5 mm X.X: ± 0.3 mm X.XX: ± 0.05 mm | Description: Cable, 3000 mm, 5.5x2.5x12 mm 50-00026 dc plug to 10 mm tinned, 18 AWG, 30-00415 R-B wire | Part number: 10-05216 |
| | | | | | Scale: 1:2 |
| | | | | | Sheet 1 of 1 |

5

↑

4

3

2

1