


ITEM NO.	PART NUMBER	DESCRIPTION	QTY.	COMPONENT NOTES
1	50-00133	Connector, dc plug, 5.5x2.1xL18.5 mm, molding style, spring contacts	1	
2	30-00415	Wire, 2C TS, 18 AWG, UL2468, 300V, 80°C, 4.4 mm, VW-1, PVC, red and black	1	
3	24-00006	Overmold	1	PVC, black

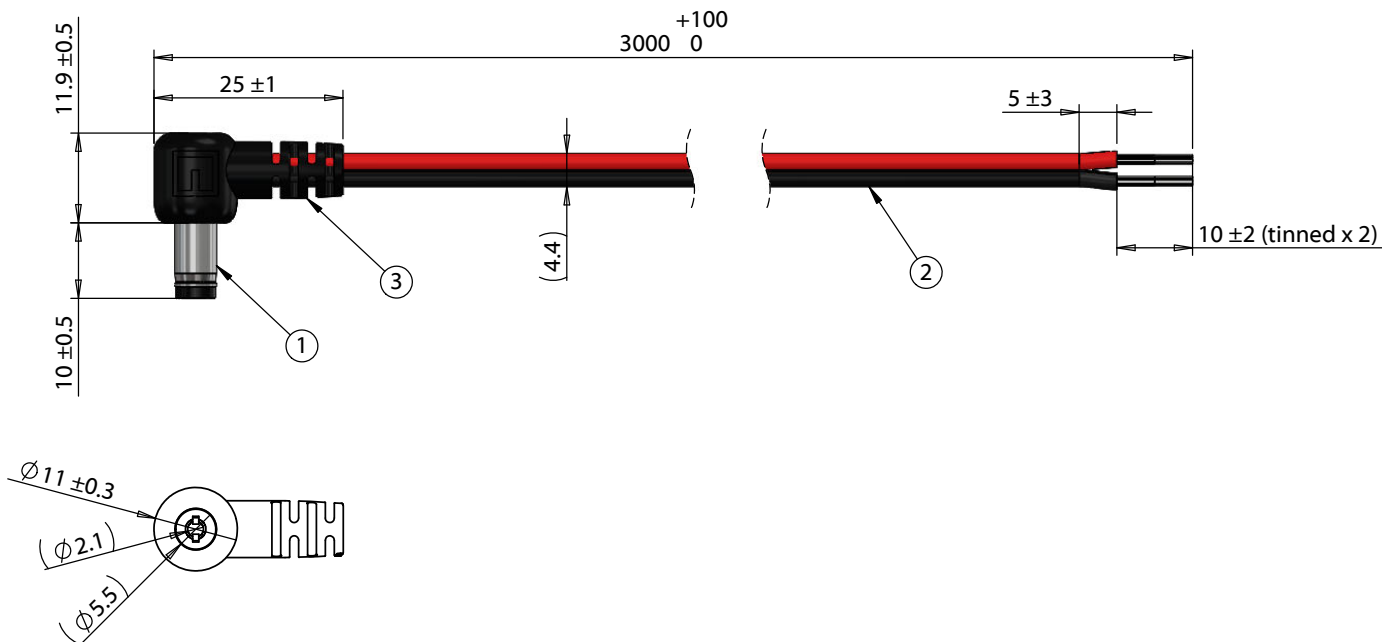

Notes:

Cables individually tied and bundled in groups of 10

Functionally equivalent components may be substituted

Cable rated for 48 V, 8.5 A

Wiring diagram	
50-00133	Wire color
Center	Red
Sleeve	Black

Revision:	Date:	Description:	Prepared:	Notes:	<h1>TENSILITY</h1> <p>tel 1.541.323.3228 800 877.670.7118 fax 1.541.323.4202 web tensility.com</p>				
A	11/1/2022	Initial release	Verified:			RoHS compliant			
			Dimensions are in millimeters.	Function test: no open, no short circuit, no intermittent	<table border="1"> <tr> <td>Size:</td> <td>Part number:</td> </tr> <tr> <td>A</td> <td>10-05228</td> </tr> </table>	Size:	Part number:	A	10-05228
Size:	Part number:								
A	10-05228								
			Tolerances: X: ± 0.5 mm X.X: ± 0.3 mm X.XX: ± 0.05 mm	Description: Cable, 3000 mm, 5.5x2.1x10 mm 90° 50-00133 dc plug to 10 mm tinned, 18 AWG, 30-00415 R-B wire	<table border="1"> <tr> <td>Scale: 1:1</td> <td></td> <td>Sheet 1 of 1</td> </tr> </table>	Scale: 1:1		Sheet 1 of 1	
Scale: 1:1		Sheet 1 of 1							

5

↑

4

3

2

1