

**Ratings**

Voltage: 300 V  
 Temperature: -80~200 °C  
 Flammability: VW-1  
 Oil resistance: 60 °C  
 ≥50% elongation and tensile strength after aging

**Conductor**

Conductor count: 1  
 Gauge: 14 AWG 2.04 mm<sup>2</sup>  
 Material: tinned copper strands  
 Strand size: Ø 0.37mm x 19  
 Resistance at 20 °C: 8.96 Ω /km max

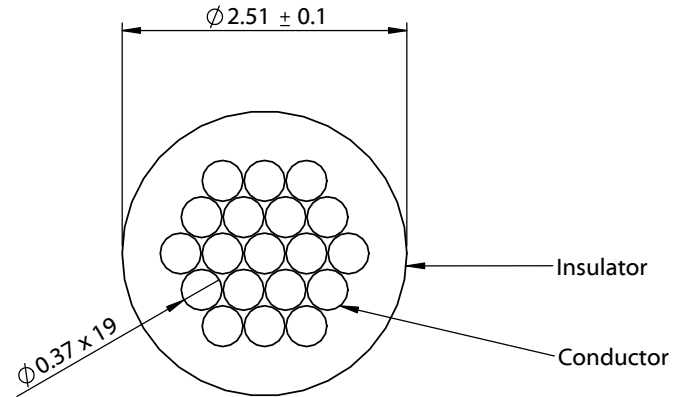
**Insulator**



Material: Fluorinated ethylene propylene (FEP)  
 Color: orange  
 Diameter: Ø 2.51 ± 0.1  
 Nominal thickness: 0.33 mm  
 Resistance at 20 °C: 2.5 MΩ /kft min

**Wire marking:** E339579 UL AWM STYLE 1332 14AWG 200°C 300V  
 VW-1 --- cUL AWM I A/B 200°C 300V FT1 TENSILITY

**Mechanical Tests**

After aging at 232±1°C for 7 days  
 Minimum tensile strength 1.76 kgf/mm<sup>2</sup>  
 Minimum elongation 200% original



Revision:	Date:	Description:	Prepared:	Notes:	<b>TENSILITY</b> tel 1.541.323.3228 800 877.670.7118 fax 1.541.323.4202 web tensility.com
A	05/20/2022	Initial release	Verified:	RoHS compliant Function test: no open, no short circuit, no Intermittent	
			Dimensions are in millimeters. Tolerances: X: ± 0.5 mm X.X: ± 0.3 mm X.XX: ± 0.05 mm	Description:	Size: Part number:
				Wire, hook-up, TS, 14 AWG, UL 1332, 300V, 200C, 2.51 mm, FEP, orange	A 30-02527
				Scale: 15:1	  Sheet 1 of 1

5

4

3

2

1