

Specifications:

connector description (1)	stereo plug, 3.5xL24.5 mm, brass nickel plated, P/N 50-00118
plug overmold (2)	30P, black PVC (including strain relief)
cable description (4)	2C, 24 AWG, 300V, 80C, 3.7 mm, shielded, PVC, 65P, P/N 30-00005
cable outer diameter	3.7 ± 0.1 mm
cable material	PVC
cable color	black
cable gauge	AWG #24
cable length	1830 ± 50 mm
shrink tube (5)	Ø2.0, 105 °C, 30 ± 2 mm length, black
twist tie (3)	black
max voltage	36 Vdc
max current	<100 mA


Notes:

RoHS compliant

Function test: no open, no reversed polarity, no short circuit, no INT

Hi-Pot test: 600 Vac, 05 mA, 1 second

Mechanical drawing:

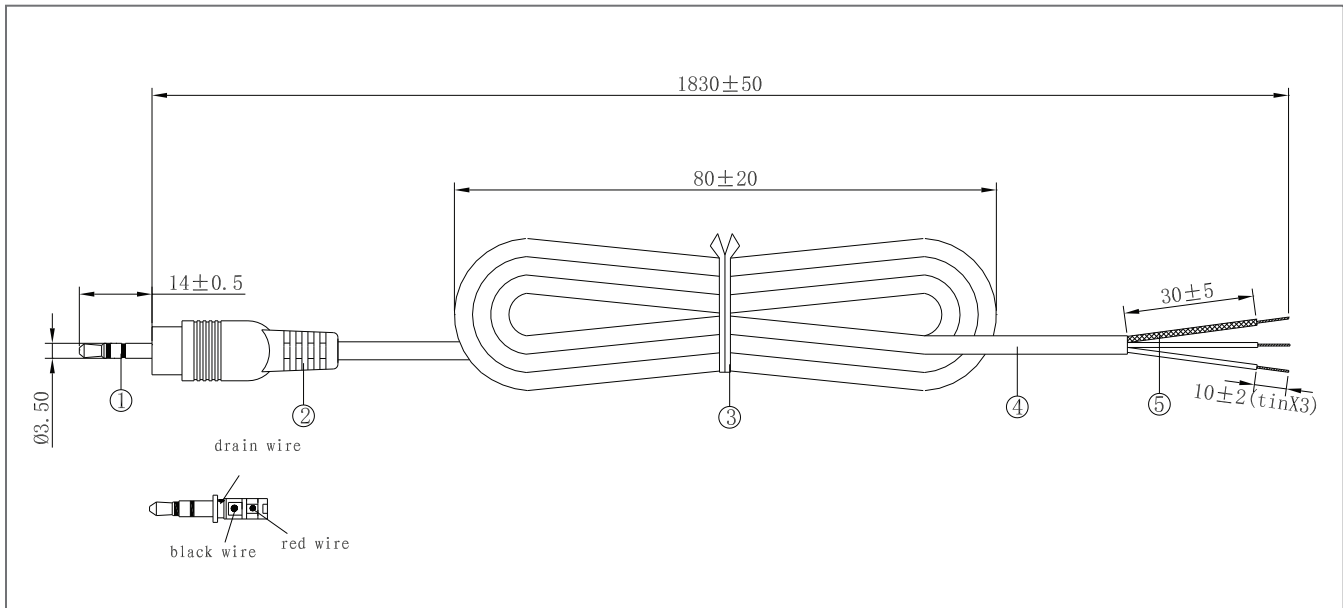

tolerance X: ±0.5 mm .X: ±0.25 mm .XX: ±0.05 mm

Revision notes:

Rev	Date	Description
A	January 19, 2009	Re-issued; original specification issued by CUI, re-issued by Tensility without any material or mechanical changes.
A1	August 31, 2011	updated description, connector, and wire information
A2	September 19, 2011	Updated specifications to match drawing

tolerance X: ± 0.5 mm .X: ± 0.25 mm .XX: ± 0.05 mm