


ITEM NO.	PART NUMBER	DESCRIPTION	QTY.	COMPONENT NOTES
1	50-00955	Connector, 8 pin M12 A-code socket, 12xL23mm, gold plated, molding style, solder cup, IP67	1	
2	50-00962	Connector, 8 pin M12 A-code plug, 12xL22mm, gold plated, molding style, solder cup, IP67	1	
3	30-01691	Wire, 8C TS, 24 AWG, UL20387, 300V, 105C, 60C oil, UV, 6.4 mm, VW-1, PVC, 80A, black	1	
4	24-00349	Overmold, M12 plug and jack, 180°	2	PVC, black

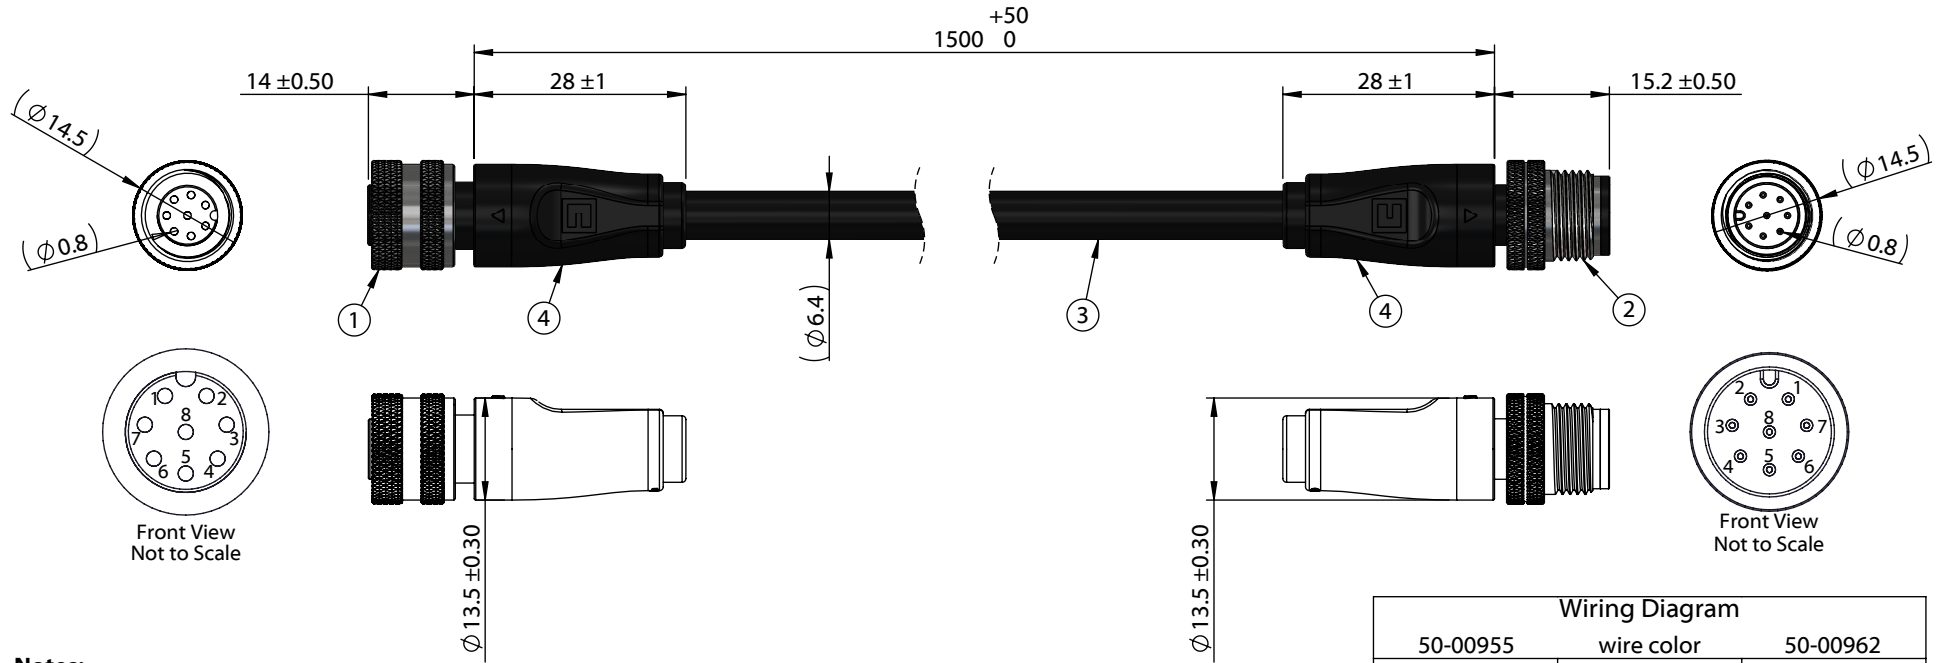

**Notes:**  
 Cable rated for 30 V, 2 A  
 Temperature: -40 ~ 105 °C  
 Oil resistant up to 60 °C  
 Water resistant up to 75 °C  
 UV resistant

IP67 waterproof rating when mated with corresponding (IP67) connector

Functionally equivalent components may be substituted

Wiring Diagram		
50-00955	wire color	50-00962
1	red	1
2	yellow	2
3	black	3
4	white	4
5	orange	5
6	blue	6
7	green	7
8	purple	8

Revision:	Date:	Description:	Prepared:	Notes:	<h1>TENSILITY</h1> <p>tel 1.541.323.3228 800 877.670.7118          fax 1.541.323.4202 web tensility.com</p>				
A	12/29/2021	Initial release	Verified:			RoHS compliant			
			Dimensions are in millimeters. Tolerances: X: ± 0.5 mm X.X: ± 0.3 mm X.XX: ± 0.05 mm	Function test: no open, no short circuit, no intermittent	<table border="1"> <tr> <td>Size:</td> <td>Part number:</td> </tr> <tr> <td>A</td> <td>10-04531</td> </tr> </table>	Size:	Part number:	A	10-04531
Size:	Part number:								
A	10-04531								
				Description: Cable, 1500 mm, 0.8 mm 8C 50-00955 M12 socket to 0.8 mm 50-00962 M12 plug, 24 AWG, 30-01691 wire	<table border="1"> <tr> <td>Scale:</td> <td>1:1</td> <td></td> <td>Sheet 1 of 1</td> </tr> </table>	Scale:	1:1		Sheet 1 of 1
Scale:	1:1		Sheet 1 of 1						

5

4

3

2

1