

Ratings

Voltage: 600 V
 Temperature: -40~105 °C
 Flammability: VW-1

Conductor


Conductor count: 2
 Gauge: 24 AWG 0.22 mm²
 Material: tinned copper strands
 Strand size: Ø 0.16 mm x 11
 Resistance at 20 °C: 94.2 Ω /km max

Outer jacket

Material: mPPE
 Color: black
 Diameter: 2.8 ± 0.2 mm (1.4±0.1x 2)
 Nominal thickness: 0.38 mm
 Insulation resistance at 20 °C: 0.75 MΩ /km min

Wire marking:

E339579 UL AWM STYLE 21516 24 AWG 105°C 600V VW-1 --- cUL
 AWM I A/B 105°C 600V FT1 Tensility

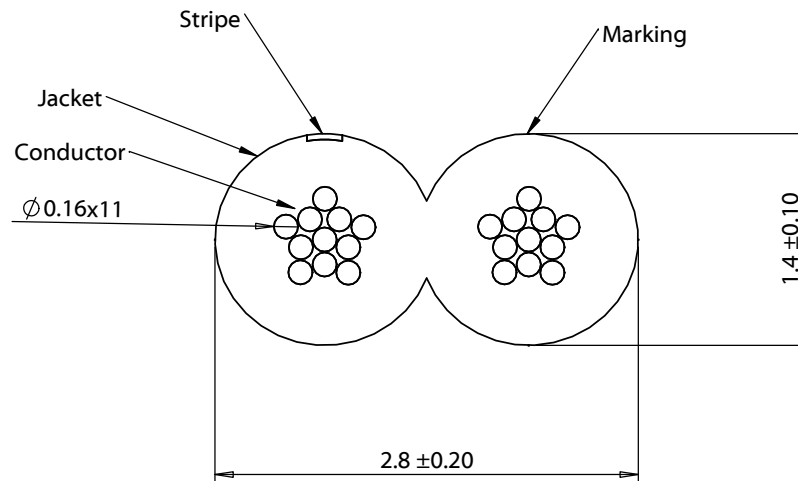

| | | | | | | |
|-----------|------------|-----------------|--|--|---|--------------|
| Revision: | Date: | Description: | Prepared: | Notes: | TENSILITY tel 1.541.323.3228 800 877.670.7118 fax 1.541.323.4202 web tensility.com | |
| A | 04/17/2023 | Initial release | Verified: | RoHS compliant Phthalate and halogen free | | |
| | | | Dimensions are in millimeters. Tolerances: X: ± 0.5 mm X.X: ± 0.3 mm X.XX: ± 0.05 mm | Description: | Size: | Part number: |
| | | | | Wire, 2C TS, 24 AWG, UL21516, 600V, 105C, 2.8 mm, VW-1, mPPE | A | 30-03157 |
| | | | | Scale: 20:1 | | Sheet 1 of 1 |

5

↑

4

3

2

1