

Ratings



Voltage: 30 V
 Temperature: 80°C
 Flammability: FT2
 UL AWM Style 1640

Conductor


Conductor count: 2
 Colors: white (30-02914), green (30-02917)
 Gauge: 22 AWG 0.33 mm²
 Material: tinned copper strands
 Strand size: 0.127mm x 26
 Resistance at 20 °C: 59.4 Ω /km max
 Target impedance: 100 Ω

Insulator

Material: foamed PE
 Color: white, green
 Diameter: 1.55 ± 0.1 mm
 Nominal thickness: 0.4 mm
 Resistance at 20 °C: 10 MΩ /km min
 Pitch ratio: 31mm

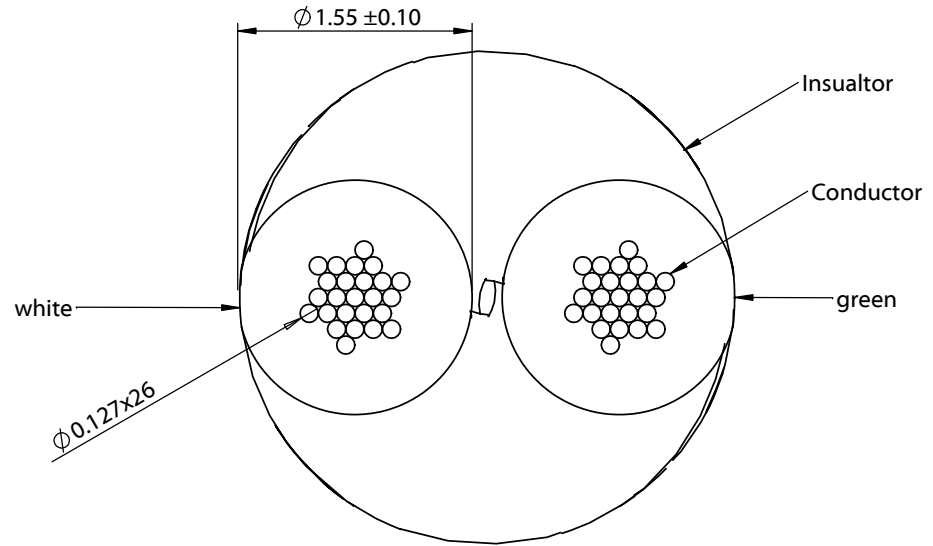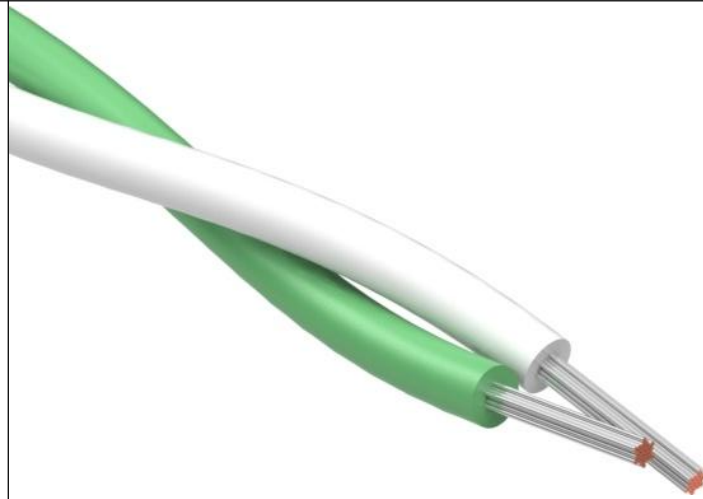

Pitch:

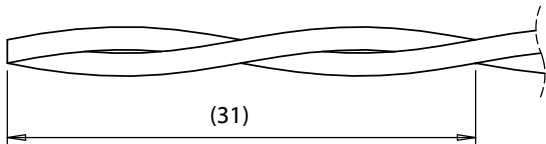

Revision:	Date:	Description:	Prepared:	Notes: RoHS compliant	<h1>TENSILITY</h1> <p>tel 1.541.323.3228 800 877.670.7118 fax 1.541.323.4202 web tensility.com</p>
A	6/15/23	Initial release	Verified:		
			Dimensions are in millimeters. Tolerances: X: ± 0.5 mm X.X: ± 0.3 mm X.XX: ± 0.05 mm	Description:	Size: Part number:
				Wire, 2C, 1 twisted pair, TS, 22 AWG, UL1640, 30V, 80C, 1.55 mm, FT2, cellular PE, white,green	A 30-03290
				Scale: 20:1	Sheet 1 of 1

4 3 2 1