**Ratings**
Voltage: 30 V
Temperature: 80°C
Flammability: FT2
UL AWM Style 1640

**Conductor**
Conductor count: 2
Colors: white (30-02914), gray (30-02920)
Gauge: 22 AWG 0.33 mm²
Material: tinned copper strands
Strand size: 0.127mm x 26
Resistance at 20 °C: 59.4 Ω /km max
Target impedance: 100 Ω

**Insulator**
Material: foamed PE
Color: white, gray
Diameter: 1.55 ± 0.1 mm
Nominal thickness: 0.4 mm
Resistance at 20 °C: 10 MΩ /km min
Pitch ratio: 31mm

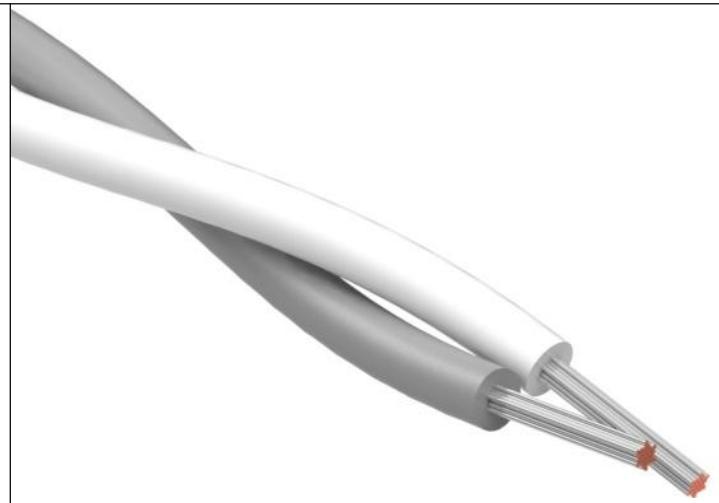

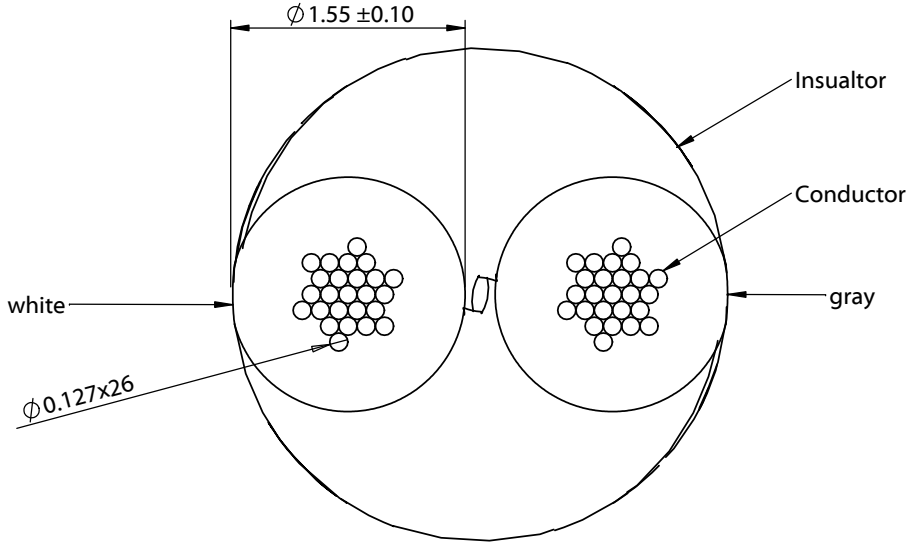


**Pitch:**

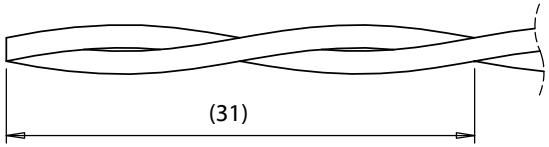


| Revision: | Date: | Description: |
|---|---|---|
| A | 6/15/23 | Initial release |
| | | |
| | | |
| | | |
| | | |

Prepared: MP Digitally signed by MP Date: 2023.07.14 14:20:45 -07'00'

Verified: PB Digitally signed by PB Date: 2023.07.13 15:55:58 -07'00'

Dimensions are in millimeters.
Tolerances:
X: ± 0.5 mm
X.X: ± 0.3 mm
X.XX: ± 0.05 mm

Notes:
RoHS compliant
Function test: no open, no short circuit, no intermittent

Description:
Wire, 2C, 1 twisted pair, TS, 22 AWG, UL1640, 30V, 80C, 1.55 mm, FT2, cellular PE, white,gray


TENSILITY
tel 1.541.323.3228 800 877.670.7118
fax 1.541.323.4202 web tensility.com


Size: A
Part number: 30-03299
Scale: 20:1
Sheet 1 of 1

To see a custom version of this cable assembly, call Tensility at 541-323-3228 or email engineering@tensility.com

5 4 3 2 1