
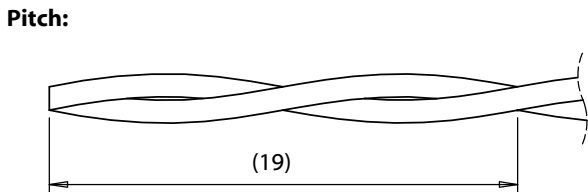
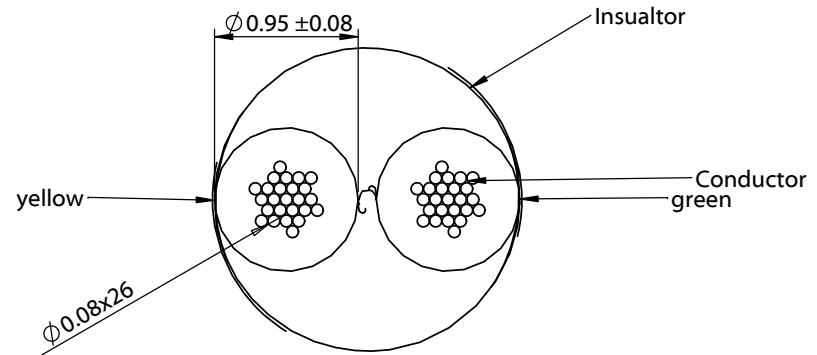


Ratings
 Voltage: 30 V
 Temperature: 80°C
 Flammability: FT2
 UL AWM Style 1640

Conductor
 Conductor count: 2
 Colors: yellow (30-02935), green (30-02937)
 Gauge: 26 AWG 0.13 mm²
 Material: tinned copper strands
 Strand size: 0.08mm x 26
 Resistance at 20 °C: 150 Ω /km max
 Target impedance: 100 Ω

Insulator
 Material: foamed PE
 Color: yellow, green
 Diameter: 0.95 ± 0.08 mm
 Nominal thickness: 0.22 mm
 Resistance at 20 °C: 10 MΩ /km min
 Pitch ratio: 19mm

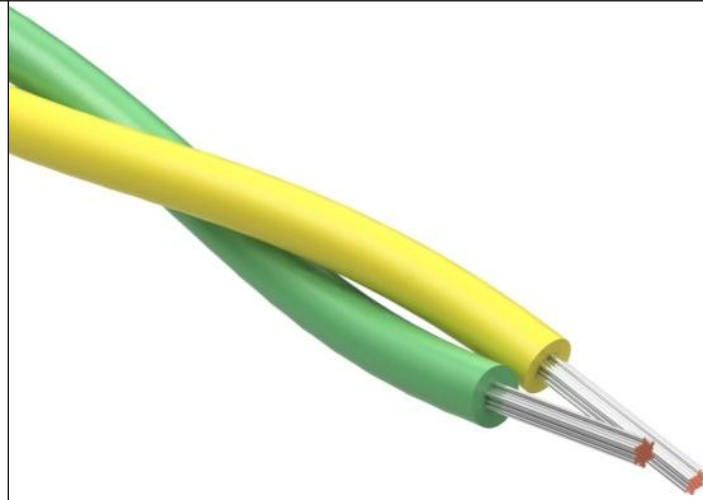

Revision:	Date:	Description:	Prepared:	Notes: RoHS compliant	<h1>TENSILITY</h1> <p>tel 1.541.323.3228 800 877.670.7118 fax 1.541.323.4202 web tensility.com</p>		
A	6/15/23	Initial release	Verified:			Function test: no open, no short circuit, no intermittent	
			Dimensions are in millimeters. Tolerances: X: ± 0.5 mm X.X: ± 0.3 mm X.XX: ± 0.05 mm	Description: Wire, 2C, 1 twisted pair, TS, 26 AWG, UL1640, 30V, 80C, 0.95 mm, FT2, cellular PE, yellow,green		Size: A	Part number: 30-03310
					Scale: 20:1		Sheet 1 of 1