

**Ratings**



Voltage: 30 V  
 Temperature: 80°C  
 Flammability: FT2  
 UL AWM Style 1640

**Conductor**


Conductor count: 2  
 Colors: white (30-02934), brown (30-02941)  
 Gauge: 26 AWG 0.13 mm<sup>2</sup>  
 Material: tinned copper strands  
 Strand size: 0.08mm x 26  
 Resistance at 20 °C: 150 Ω /km max  
 Target impedance: 100 Ω

**Insulator**

Material: foamed PE  
 Color: white, brown  
 Diameter: 0.95 ± 0.08 mm  
 Nominal thickness: 0.22 mm  
 Resistance at 20 °C: 10 MΩ /km min  
 Pitch ratio: 19mm

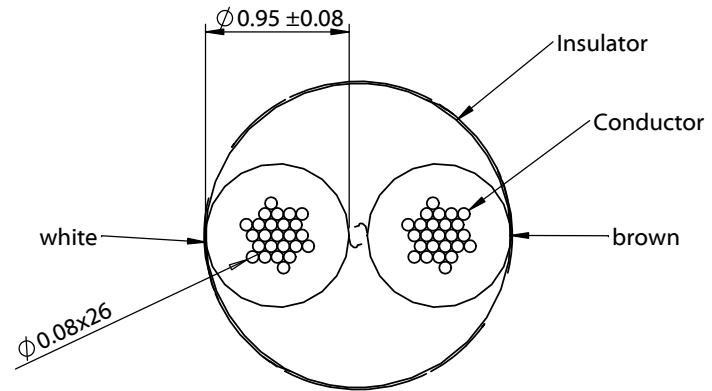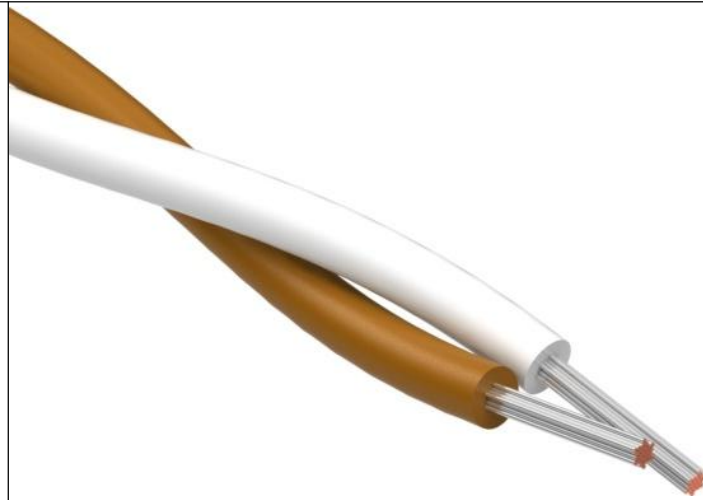

**Pitch:**

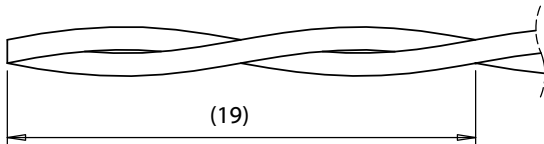

Revision:	Date:	Description:	Prepared:	Notes: RoHS compliant	<h1>TENSILITY</h1> tel 1.541.323.3228 800 877.670.7118 fax 1.541.323.4202 web tensility.com
A	6/15/23	Initial release	Verified:		
			Dimensions are in millimeters. Tolerances: X: ± 0.5 mm X.X: ± 0.3 mm X.XX: ± 0.05 mm	Description:	Size: Part number:
				Wire, 2C, 1 twisted pair, TS, 26 AWG, UL1640, 30V, 80C, 0.95 mm, FT2, cellular PE, white,brown	A 30-03283
				Scale: 20:1	Sheet 1 of 1

4 3 2 1